


PC MOUNTING





| POS. 1 | POS. 2 | POS. 3 |
|----------|--------|----------|
| | | |
| ON | NONE | ON |
| 2-1, 5-4 | N/A | 2-3, 5-6 |



CIRCUIT: DPDT

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- PLATING MATERIAL: SILVER
- CONTACT RATING: 5A@120VAC or 28VDC
2A@250VAC
- TRAVEL: 2.16mm
- ELECTRIC LIFE: 30,000 ACTUATIONS AT FULL LOAD.
- CONTACT RESISTANCE: 10 milli-OHMS TYP.
- INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
- DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
- OPERATING TEMP.: -30°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- 2002/95/EC (ROHS) COMPLIANT

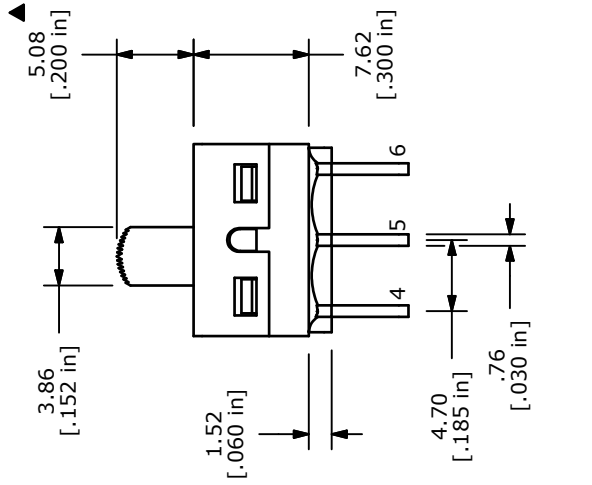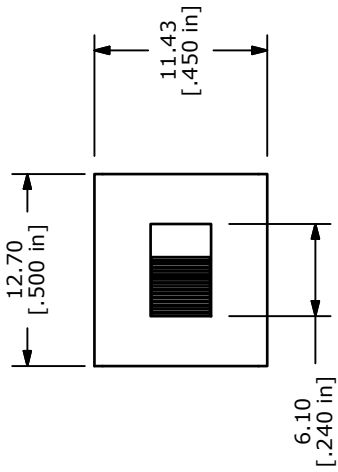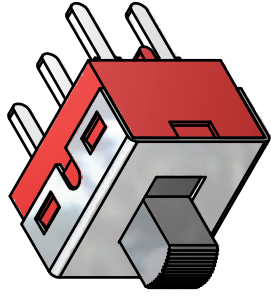

E-SWITCH™

TITLE 500SPD1S1M2QEA

| | | | | |
|-----|--------|---------------------------|--------|-----|
| D | 19567 | DRAWING UPDATE / CLEAN-UP | 1/7/11 | BGL |
| REV | PCR NO | DESCRIPTION | DATE | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1

DATE 1/7/2011

DR BGL

DWG T521001

REV D